

Налаштування ADSL-Модему Iskratel Calisto 821+R3 у режимі маршрутизатора (роутер)





Схема підключення:




Налаштування модему


«Створення на модемі необхідного PVC з'єднання»

1. Підключіть модем до комп'ютеру та відкрийте веб-браузер
2. В адресному рядку пропишіть IP-адресу 192.168.1.1 (IP-адреса за замовчанням)

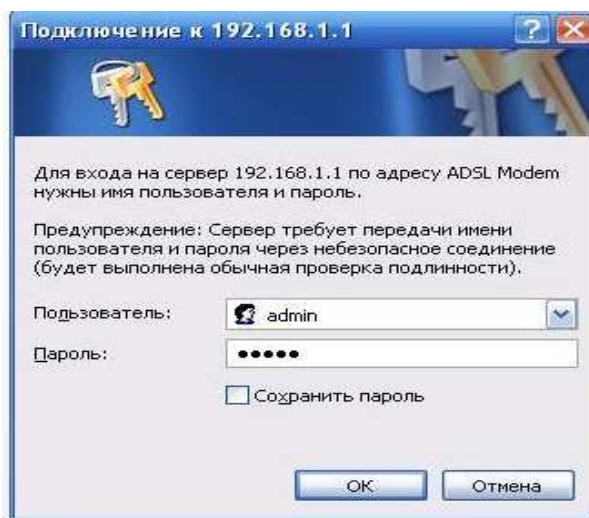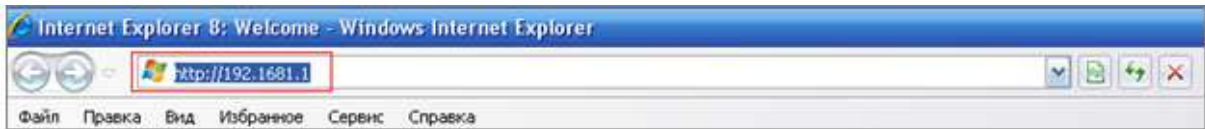



3. У вікні авторизації пропишіть «Пользователь – **admin**», «Пароль – **admin**» та натисніть кнопку 

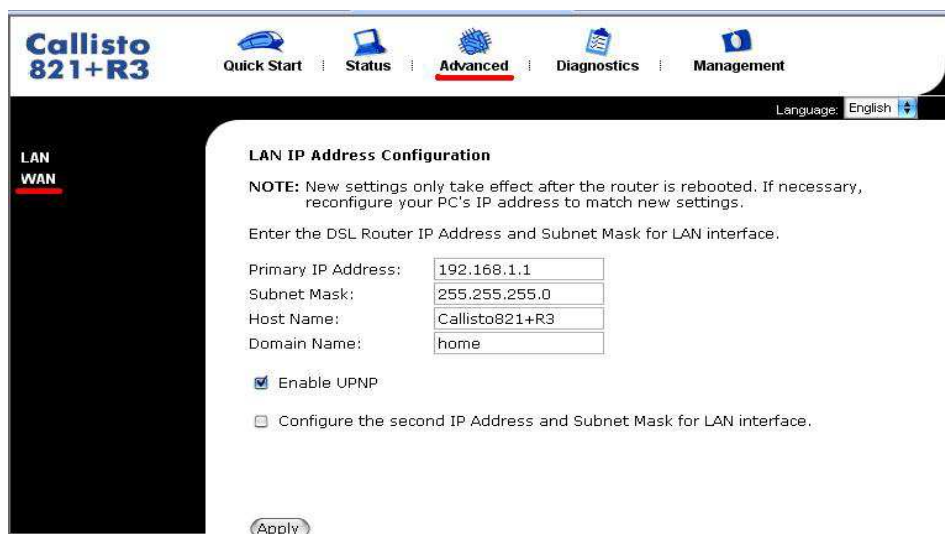4. У вікні, що з'явилося, оберіть розділ «**Advanced**»



5. Потім зайдіть у розділ «WAN»

The screenshot shows the Callisto 821+R3 web interface. The top navigation bar includes 'Quick Start', 'Status', 'Advanced', 'Diagnostics', and 'Management'. The left sidebar shows 'LAN', 'WAN', 'Connections', and 'ADSL'. The main content area is titled 'Internet Connection Configuration'. It contains instructions: 'Choose Add or Edit to configure Internet connection. Choose Finish to apply the changes and reboot the system.' A note states: 'NOTE: The Internet connection is NOT active if the PVC name is marked with (?). You need to click "Finish" to apply the changes and reboot the system for activating this PVC.' Below the text is a table with the following data:

PVC Name	VPI/VCI	Category	Protocol	NAT	WAN IP Address	Edit
br_1_32	1/32	UBR	Bridge LLC/SNAP	*	*	 

Below the table are 'Add' and 'Finish' buttons.

6. Натисніть кнопку  і вкажіть наступні значення:

VPI: **1**

VCI: **32**

Service category: «**UBR without PCR**»

Натисніть «**Next**»

7. На наступній сторінці поставте крапку напроти «**PPP over Ethernet**» і з випадаючого списку виберіть «**LLC/SNAP**». Натисніть «**Next**»

The screenshot shows the 'Configure Internet Connection - Connection Type' page in the Callisto 821+R3 web interface. The top navigation bar and left sidebar are the same as in the previous screenshot. The main content area is titled 'Configure Internet Connection - Connection Type'. It contains the instruction: 'Select the protocol and encapsulation type over the ATM PVC that your ISP has instructed you to use.' Below this, there are two sections: 'Protocol:' and 'Encapsulation Mode:'. The 'Protocol:' section has five radio button options: 'PPP over ATM (PPPoA)', 'PPP over Ethernet (PPPoE)', 'MAC Encapsulation Routing (MER)', 'IP over ATM (IPoA)', and 'Bridging'. The 'PPP over Ethernet (PPPoE)' option is selected and underlined in red. The 'Encapsulation Mode:' section has a dropdown menu with 'LLC/SNAP' selected. At the bottom right, there are '< Back' and 'Next >' buttons, with the 'Next >' button underlined in red.

8. В наступному вікні поставте відмітки як показано на рисунку. Натисніть «Next»

The screenshot shows the 'Configure Internet Connection - WAN IP Settings' page. The left sidebar has 'WAN' selected. The main content area has the following options:

- Obtain an IP address automatically
- Use the following IP address:
 - WAN IP Address:
- Enable NAT
- PPP IP extension

At the bottom right, there are '< Back' and 'Next >' buttons, with 'Next >' being the active button.

9. Напроти **PPP Username** і **PPP Password** вкажіть **логін** та **пароль**

УВАГА! Логін та пароль чутливі до регістру!

УВАГА! Логін та пароль знаходяться в договорі або в реєстраційній картці в залежності від способу підключення!

Поставте відмітки, як показано на рисунку і натисніть «Next»

The screenshot shows the 'Configure Internet Connection-PPP User Name and Password' page. The left sidebar has 'WAN' selected. The main content area has the following options:

- PPP User Name:
- PPP Password:
- Session established by:
 - Always Online
 - Dial on Demand
 - Disconnect if no activity for minutes.
 - manual
 - Disconnect if no activity for minutes.

At the bottom right, there are '< Back' and 'Next >' buttons, with 'Next >' being the active button.

10. Для збереження налаштувань натисніть «Apply», потім «Finish»

The screenshot shows the Callisto 821+R3 router configuration interface. The top navigation bar includes 'Quick Start', 'Status', 'Advanced', 'Diagnostics', and 'Management'. The left sidebar lists 'LAN', 'WAN', 'Connections', and 'ADSL'. The main content area is titled 'This Internet Connection -- Summary' and contains the following information:

Make sure that the settings below match the settings provided by your ISP.

Internet (WAN) Configuration:

VPI / VCI	1 / 32
Service Category	UBR
Connection Type	PPPoE, LLC/SNAP, Always On
NAT	Enabled
WAN IP Address	Automatically Assigned
Default Gateway	Automatically Assigned
DNS Server	Automatically Assigned

Click "Apply" to save settings. Click " Back" to make any modification.

Buttons: < Back, Apply

The screenshot shows the Callisto 821+R3 router configuration interface. The top navigation bar includes 'Quick Start', 'Status', 'Advanced', 'Diagnostics', and 'Management'. The left sidebar lists 'LAN', 'WAN', 'Connections', 'ADSL', 'IP Routing', 'DNS Server', 'NAT', 'Firewall', and 'IGMP Proxy'. The main content area is titled 'Internet Connection Configuration' and contains the following information:

Choose Add or Edit to configure Internet connection.
Choose Finish to apply the changes and reboot the system.

NOTE: The Internet connection is NOT active if the PVC name is marked with (?). You need to click "Finish" to apply the changes and reboot the system for activating this PVC.

PVC Name	VPI/VCI	Category	Protocol	NAT	WAN IP Address	Edit
pppoe_1_32(?) Connect	1/32	UBR	PPPoE LLC/SNAP	On	Automatically Assigned	...

Buttons: Add, Finish

Після перевантаження (40 сек.) модем готовий до роботи у режимі роутера.