

Налаштування модему "Iskratel Callisto 821+R3" в режимі «bridge»

УВАГА! В даному режимі налаштування модему без додатного обладнання «маршрутизатор» можливе підключення лише одного ПК!


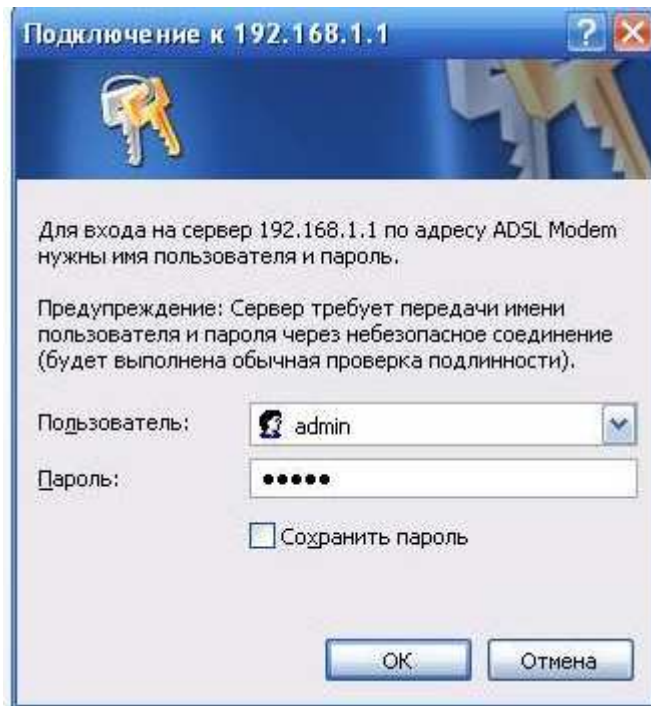



Схема підключення:




Налаштування модему «Створення на модемі необхідного PVC з'єднання»

1. Підключіть модем до комп'ютеру та відкрийте веб-браузер
2. В адресному рядку пропишіть IP-адресу 192.168.1.1 (IP-адреса за замовчанням)

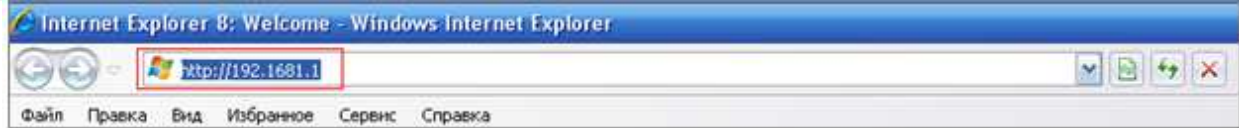

3. У вікні авторизації пропишіть «Пользователь – «**admin**», «Пароль – «**admin**» та натисніть кнопку 
4. У вікні, що з'явилося, оберіть розділ **Quick Start**, потім **Quick Setup**

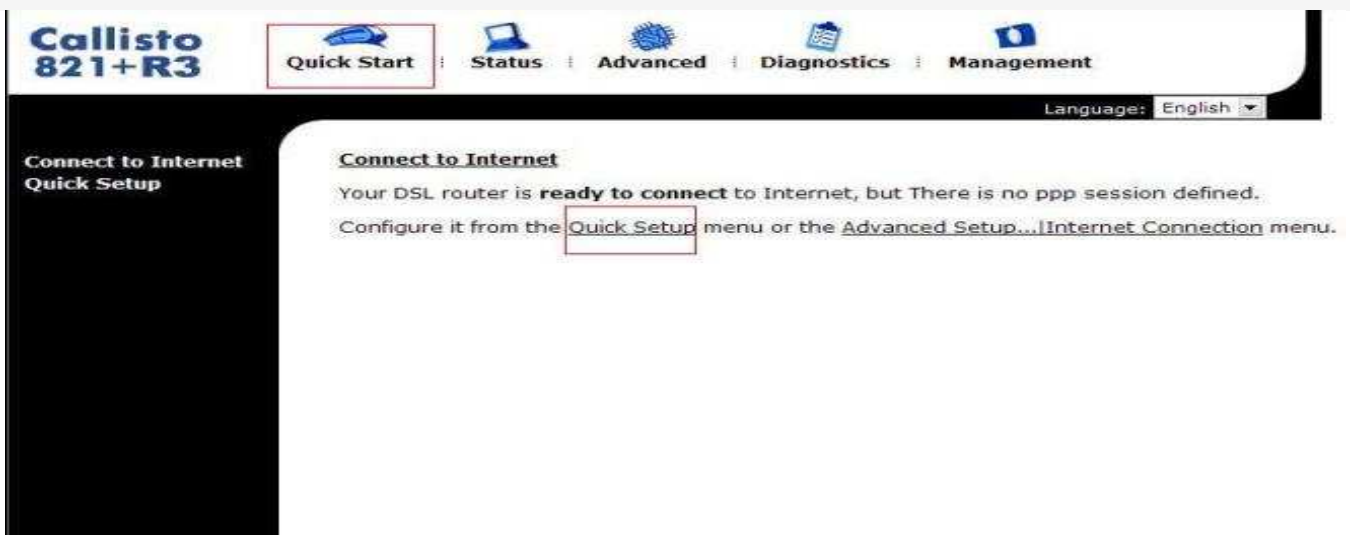

5. У таблиці, необхідно видалити всі рядки і запустити створення нової конфігурації.
Встановіть **VPI = 1**, **VCI = 32** і натисніть "**Next**".

The screenshot shows the 'Quick Setup' page of the Callisto 821+R3 web interface. The page title is 'Connect to Internet Quick Setup'. The navigation menu includes 'Quick Start', 'Status', 'Advanced', 'Diagnostics', and 'Management'. The language is set to 'English'. The main content area is titled 'Quick Setup' and contains the following text: 'This Quick Setup will guide you through the steps necessary to configure your DSL Router. NOTE: All of original settings will be replaced by new settings after you finish these steps. Configure Internet Connection -- ATM PVC'. Below this, it says 'Please enter VPI and VCI numbers for the Internet connection which is provided by your ISP.' There are two input fields: 'VPI: 1 (0-255)' and 'VCI: 32 (32-65533)'. A 'Next >' button is located at the bottom right.

6. У вікні, поставте крапку на "**Bridging**", оберіть "LLC / SNAP" і натисніть "**Next**".

The screenshot shows the 'Configure Internet Connection - Connection Type' page of the Callisto 821+R3 web interface. The page title is 'Connect to Internet Quick Setup'. The navigation menu is the same as in the previous screenshot. The language is set to 'English'. The main content area is titled 'Configure Internet Connection - Connection Type' and contains the following text: 'Select the protocol and encapsulation type over the ATM PVC that your ISP has instructed you to use.' Under 'Protocol:', there are five radio button options: 'PPP over ATM (PPPoA)', 'PPP over Ethernet (PPPoE)', 'MAC Encapsulation Routing (MER)', 'IP over ATM (IPoA)', and 'Bridging'. The 'Bridging' option is selected. Below this, there is an 'Encapsulation Mode:' dropdown menu with 'LLC/SNAP' selected. '< Back' and 'Next >' buttons are located at the bottom right.

7. Далі без змін натисніть "**Next**".

**Connect to Internet
Quick Setup**

Configure LAN side Settings

Enter the ADSL router IP address and subnet mask for LAN interface and then enable DHCP server on LAN interface to provide IP address settings for your computers.

Primary IP address:

Subnet Mask:

Configure secondary IP address and subnet mask

DHCP Server

Enabling DHCP Server on LAN interface can provide the proper IP Address setting to your computers.

Enable DHCP server on the LAN

8. Після завершення натисніть «**Apply**» і перезавантажте модем.

**Connect to Internet
Quick Setup**

This Internet Connection -- Summary

Make sure that the settings below match the settings provided by your ISP.

Internet (WAN) Configuration:

VPI / VCI	1 / 32
Connection Type	Bridge, LLC/SNAP


LAN Setting:

Primary LAN IP	192.168.1.1 /255.255.255.0
Secondary LAN IP	0.0.0.0 /0.0.0.0
DHCP Sever	Disable


Click "Apply" to accept these settings. Click "Back" to make any modifications.

Створення високошвидкісного підключення на ПК


1. Необхідно зайти в меню «Пуск» -> «Панель управління»

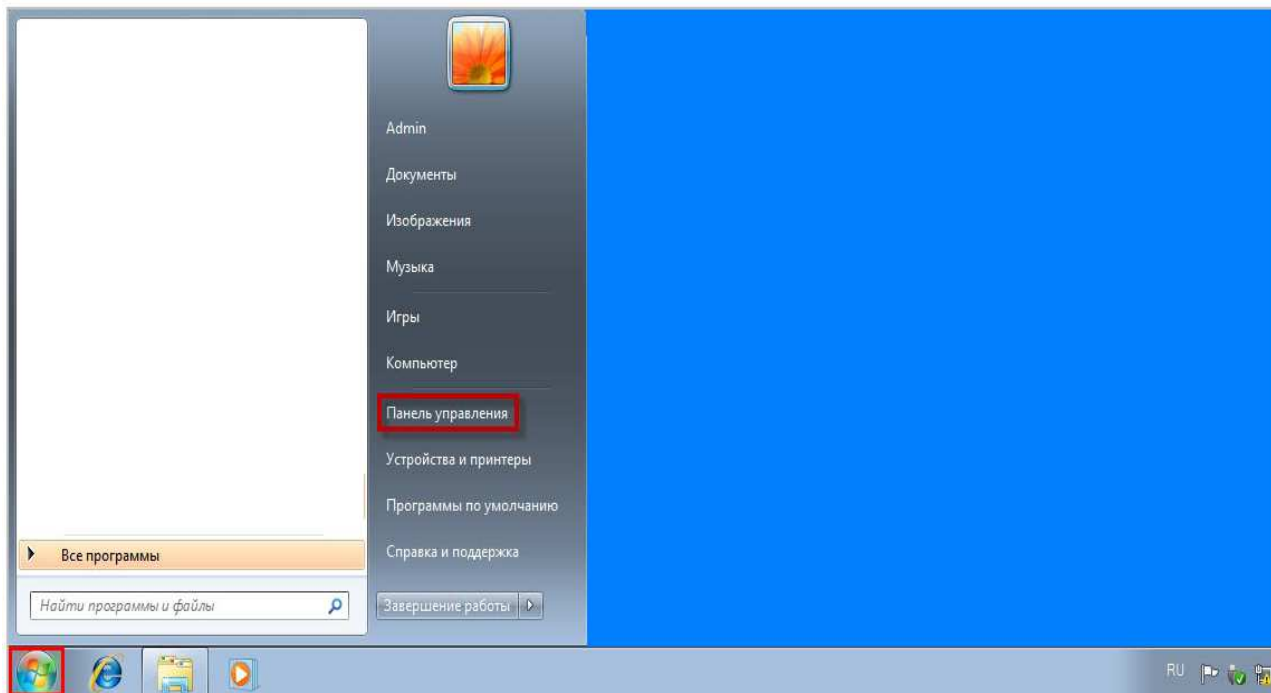


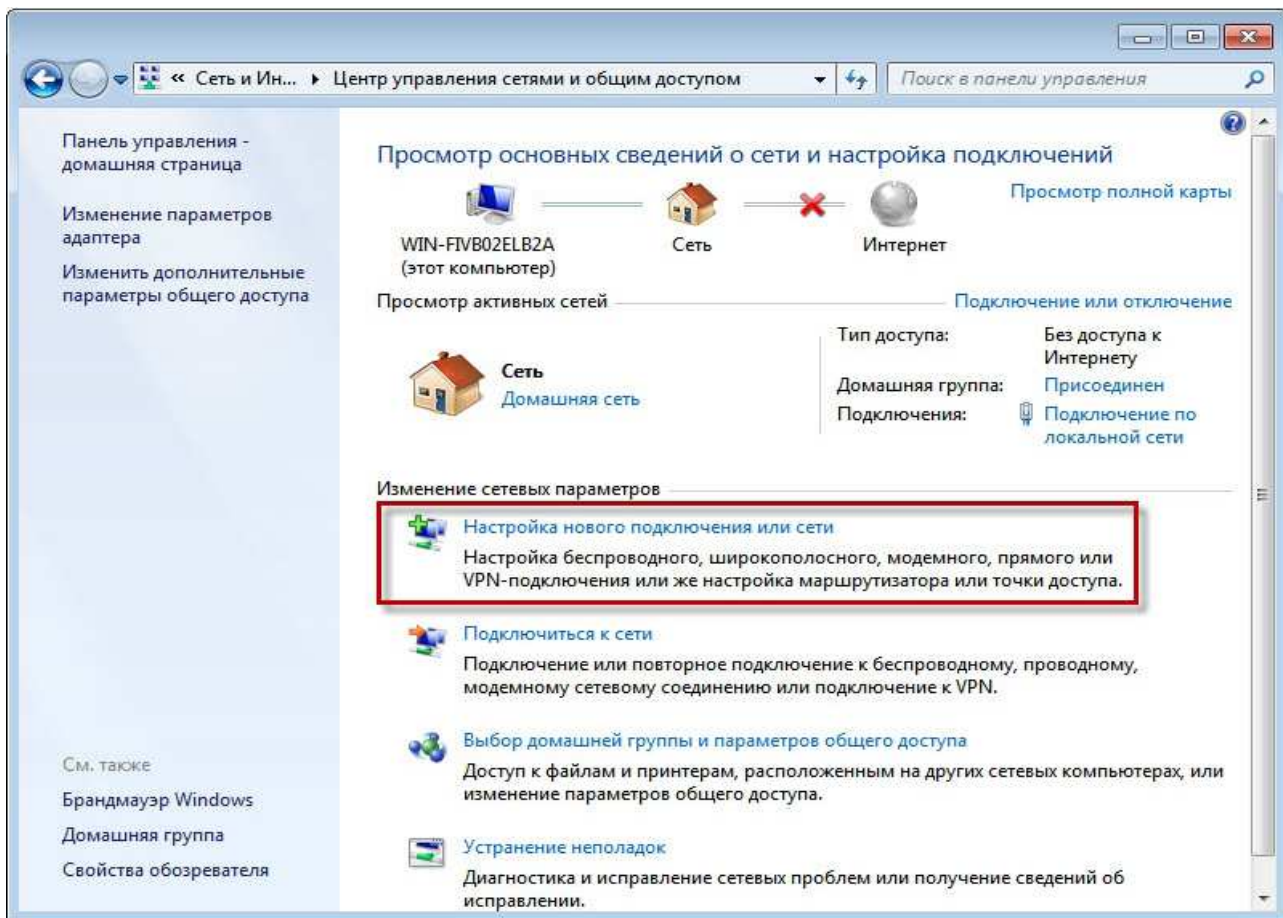
2. В «Панели управление» у разі відображення по категоріях необхідно змінити зображення на «Крупные значки»

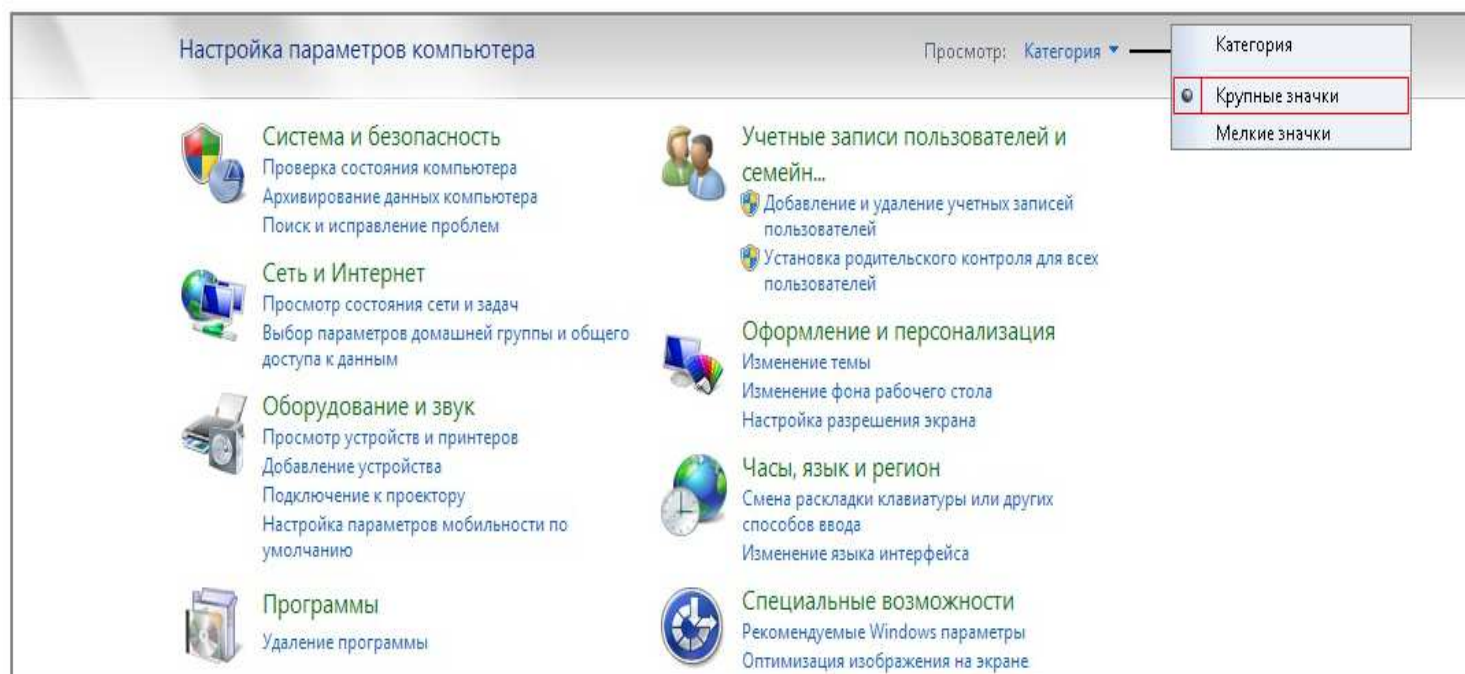


3. Необходимо выбрать ярлик  «Центр управления сетями и общим доступом»

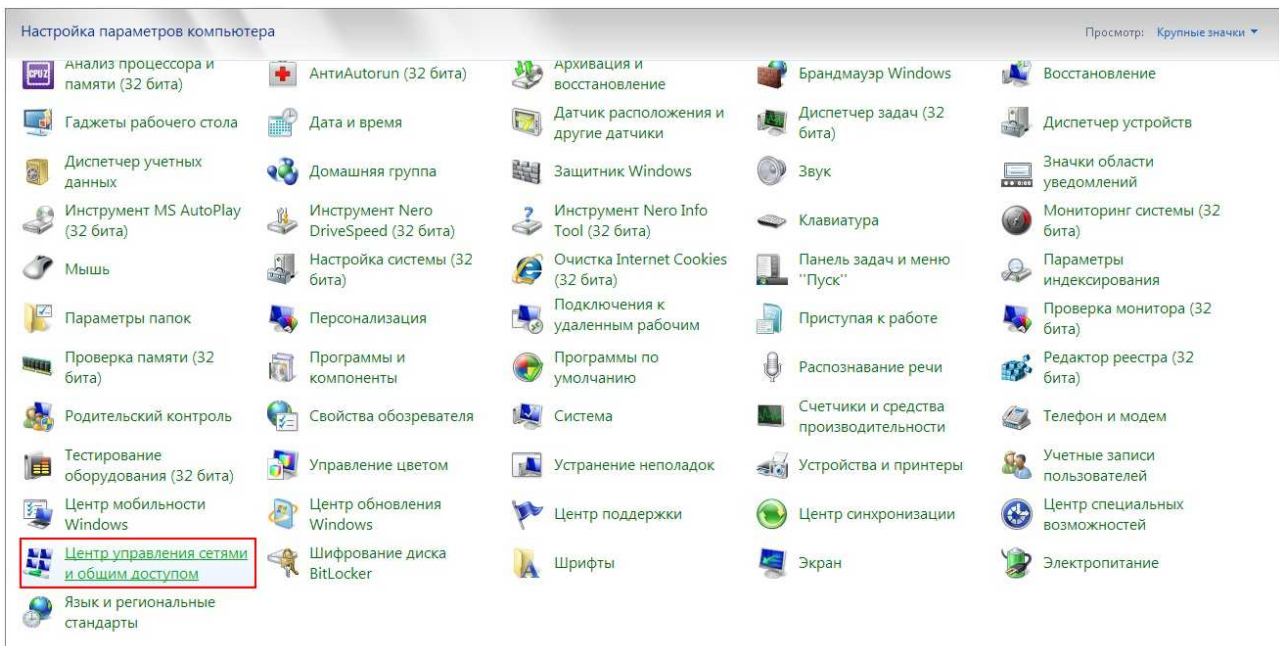

4. У вікні «**Центр управления сетями и общим доступом**» для створення нового підключення необхідно натиснути на ярлик  «**Настройка нового подключения или сети**»



5. Виберіть варіант підключення **«Подключение к Интернету»**
«Беспроводное, скоростное или телефонное подключение к Интернету» та натисніть кнопку **«Далее»**
6. Виберіть тип підключення **«Высокоскоростное (с PPPoE)»**

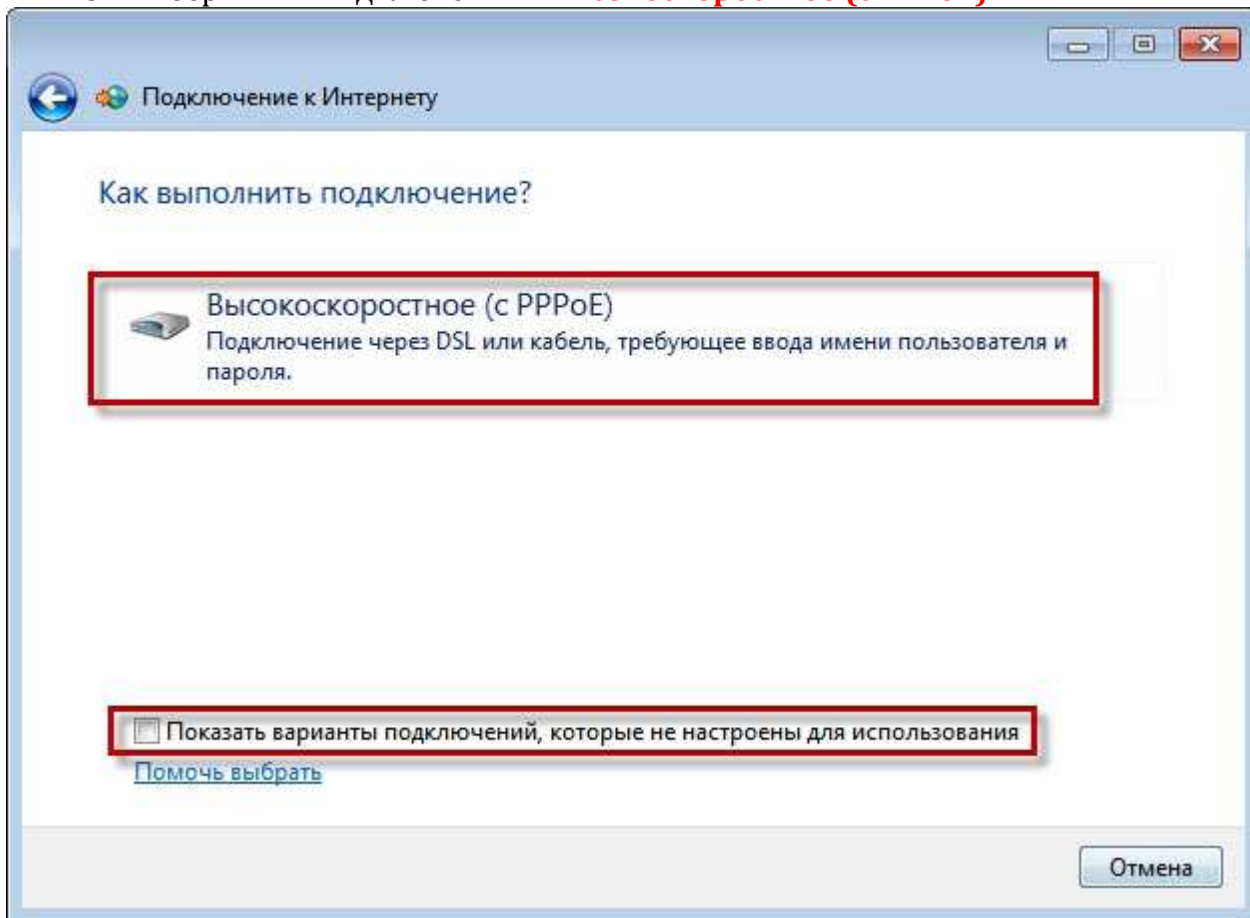

В полі **«Имя пользователя»** вкажіть свій логін з доменом

В полі **«Пароль»** вкажіть свій пароль та натисніть кнопку **«Подключить»**.

УВАГА! Логін та пароль чуттєві до регістру

УВАГА! Логін та пароль заходяться в договорі або в реєстраційній картці в залежності від способу підключення